



Alarm Bar

"The Art of Gas Detection"



Four Light Alarm Bar With Horn



Two Light Alarm Bar With Horn

Sounder Features



Maximum output: 104dB(A) @ 1 metre [95dB(A) @ 10ft/3m]
 Nominal output: 100dB(A) @ 1m +/- 3dB - Tone 2 [91dB(A) @ 10ft/3m]
 No. of tones: 32 (UKOOA / PFEER compliant)
 No. of stages: 3
 Volume control: Max. 100dB(A); Min. 90dB(A) - Tone 2
 Effective range: 32m/105ft @ 1KHz
 Voltages DC: 24V dc (10-30V dc); 48V dc (35-60V dc)

DC units can use 24V ac for single stage applications

Voltages AC: 2 4V ac; 115V ac; 2 30V ac
 Stage switching: Negative; Reverse polarity stage switching on DC units
 Ingress protection: IP66
 Housing material: High impact UL94 V0 & 5VA FR ABS

Strobe Features

High power LED
 NEMA 4X
 UL Listed
 Input voltage 12-80 VDC
 200 mA @ 24VDC Flashing; 420 mA Steady-burn
 Lexan lens
 Steady-on or Flashing
 Sealed construction - NEMA 6P capable
 5 LED colors - Amber, Blue, Red, Green, and White

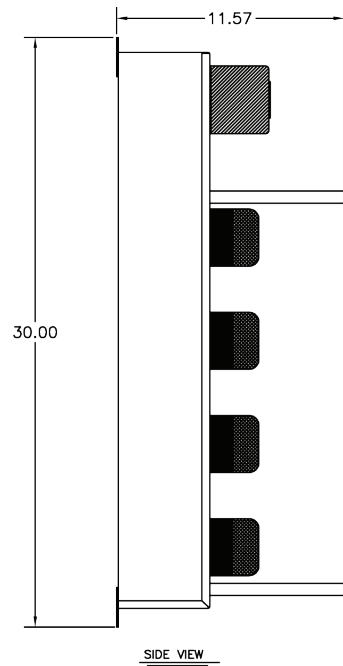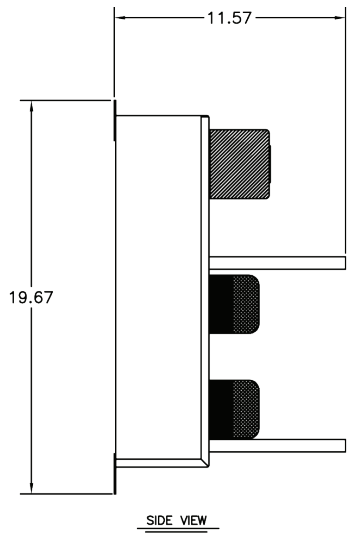

Ø0.37-

